

MX410B


Highly dynamic
universal amplifier

Special features

- 4 individually configurable inputs (electrically isolated)
- Connection of more than 5 transducer technologies
- Individual sample rates up to 100 kS per channel, 200 kS at 2 channels
- 24-bit A/D converter per channel for synchronous, parallel measurements
- 4 analog outputs
- Real-time computation (Peak, RMS)
- Supply voltage (DC) for active transducers: 5 V ... 24 V



Block diagram

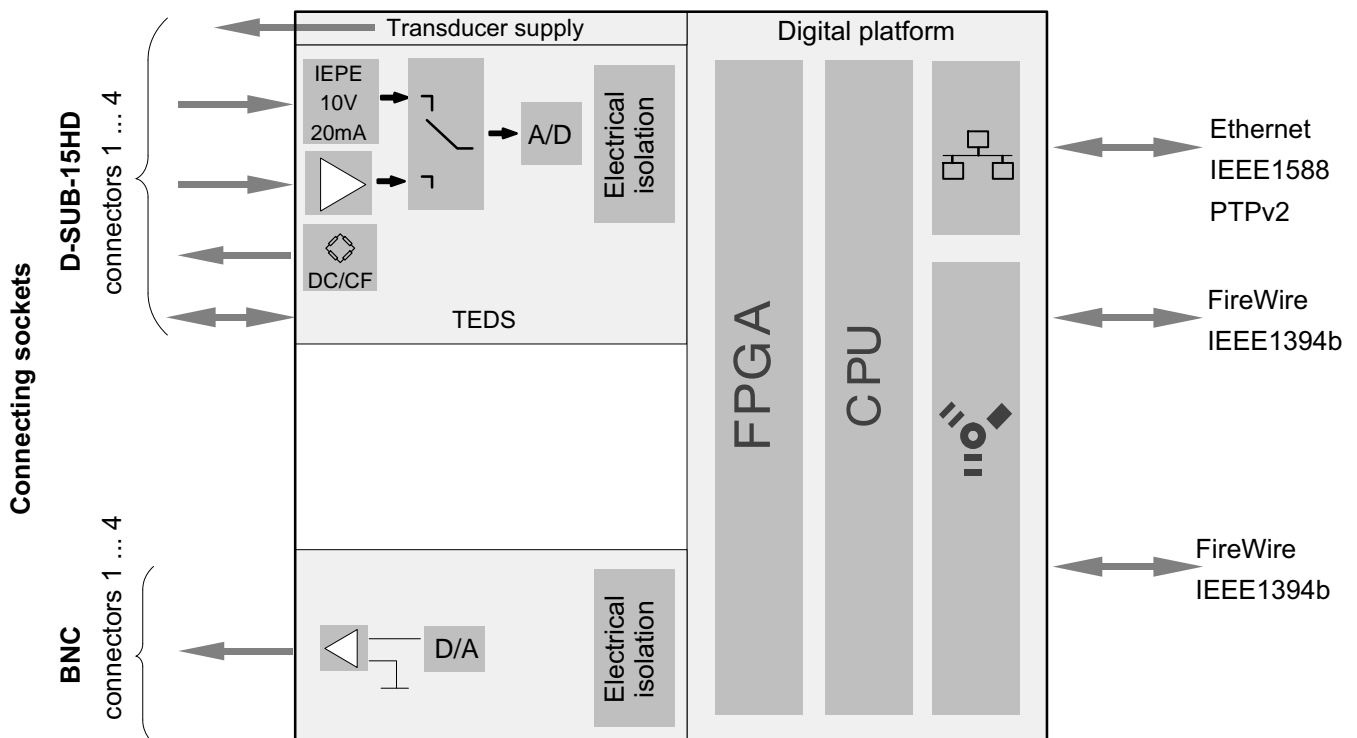

Specifications MX410B

| General specifications | | |
|---|--------------------------------------|--|
| Inputs | number | 4, electrically isolated from each other and from supply ¹⁾ |
| Transducer technologies per connector | | Strain gage, half and full bridge (carrier frequency or DC), Quarter-bridge with 1-SCM-SG120/350, piezoresistive full bridge, IEPE (ICP [®]), Inductive half and full bridge, voltage, normalized voltage (± 10 V), electric voltage up to 300 V CAT II with Adapter-SCM-HV, normalized current (20 mA) |
| A/D conversion | | 24-bit delta-sigma converter |
| Sample rates (Domaine adjustable by software, Factory setting is „HBM Classic) | Hz | Decimal : 0.1 ... 100,000, adjustable for each channel 0.1 ... 200,000 in two-channel mode HBM Classic: 0.1 ... 96,000 adjustable for each channel 0.1 ... 192,000 in two-channel mode |
| Bandwidth (-3 dB) | kHz | 38 78 in two-channel mode |
| Active low pass filter (Bessel/Butterworth, adjustable) | Hz | 0.1 ... 20,000 |
| Transducer identification max. TEDS module distance | m | TEDS, IEEE 1451.4 100 |
| Transducer connection | | D-SUB-15HD |
| Analog outputs | | 4 (BNC), electrically isolated to measurement inputs and to supply (not to one another) |
| Supply voltage range (DC) | V | 10 ... 30 (nominal (rated) voltage 24 V) |
| Supply voltage interruption | | max. for 5 ms at 24 V |
| Power consumption without adjustable transducer excitation with adjustable transducer excitation | W | < 12 < 15 |
| Supply voltage (active transducers) Adjustable transducer excitation (DC) Maximum output power | V W | 5 ... 24; adjustable channel by channel 0.7 per channel / 2 in total |
| Ethernet (data link) Protocol/addressing Plug connection Max. cable length to module | - - m | 10Base-T / 100Base-TX TCP/IP (direct IP address or DHCP) 8P8C-modular plug (RJ-45) with twisted pair cable (CAT-5) 100 |
| Synchronization options EtherCAT ^{®4)} IRIG-B (B000 to B007; B120 to B127) IEEE1588 (PTPv2), NTP | | IEEE1394b FireWire (only QuantumX, automatically, recommended) via CX27 via MX440A- or MX840A input channel Ethernet based Network Time Protocol |
| IEEE1394b FireWire (module synchronization, data link, optional supply voltage) Baud rate Max. current from module to module Max. cable length between nodes Max. number of modules connected in series (daisy chain) Max. number of modules in a IEEE1394b FireWire system (incl. hubs ²⁾ , backplane) Max. number of hops ³⁾ | MBaud A m - - - | IEEE 1394b (HBM modules only) 400 (approx. 50 MBytes/s) 1.5 5 12 (= 11 hops) 24 14 |
| Nominal (rated) temperature range | °C [°F] | -20 ... +65 [-4 ... +149] |
| Storage temperature range | °C [°F] | -40 ... +75 [-40 ... +167] |
| Relative humidity | % | 5 ... 95 (non-condensing) |
| Protection class | - | III |
| Degree of protection | | IP20 per EN60529 |
| Mechanical tests⁵⁾ Vibration (30 min) Shock (6 ms) | m/s ² m/s ² | 50 350 |
| EMC requirements | | per EN 61326 |
| Maximum input voltage at transducer socket to ground (PIN 6 or PIN 9) PIN 1, 2, 3, 4, 5, 7, 8, 10 (bridge and TEDS) PIN 14 (voltage) PIN 13 (current) PIN 4, 15 (control circuits) | V V V V | ± 5.5 ± 40 ± 1.5 $+ 3.3$ |

1) When variable transducer supply is used, there is no electrical isolation from the supply.

2) Hub: IEEE1394b FireWire node point or distributor

3) Hop: transition from module to module/signal conditioning

4) EtherCAT[®] is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

5) Mechanical stress is tested in accordance with European standards EN60068-2-6 for vibration and EN60068-2-27 for shock. The devices are exposed to an acceleration of 50 m/s² within the frequency range 5...65 Hz in all 3 axes. Duration of this vibration test: 30 minutes per axis. The shock test is implemented at a nominal (rated) acceleration of 350 m/s² for a duration of 6 ms, half sine and with shocks in each of the six possible directions.

Specifications MX410B (continued)

| | | |
|------------------------------------|----|--|
| Dimensions, horizontal (H x W x D) | mm | 52.5 x 200 x 122 (with case protection) |
| | mm | 44 x 174 x 119 (without case protection) |
| Weight, approx. | g | 990 |

| Strain gage full bridge and half bridge 4 mV/V CF with excitation 1 V or 2.5 V or 5 V (AC, effective) | | |
|---|--------|---|
| Accuracy class | | 0.05 ¹⁾ |
| Carrier frequency (sine) | Hz | 4,800 ± 2 |
| Bridge excitation voltage (effective) | V | 1; 2.5; 5 (± 5 %) |
| Transducers that can be connected | | Strain gage and inductive full and half bridges |
| Permissible cable length between MX410B and transducer | m | < 100 |
| Measuring ranges | | |
| at 5 V excitation | mV/V | ± 4 |
| at 2.5 V excitation | mV/V | ± 8 |
| at 1 V excitation | mV/V | ± 20 |
| Additional shunt resistor can be connected (control signal) | kΩ | 100 ± 0.1% |
| Measurement frequency range (-3 dB) | Hz | 0 ... 1,600 |
| Transducer impedance | | |
| at 5 V excitation | Ω | 300 ... 1,000 |
| at 2.5 V excitation | Ω | 110 ... 1,000 |
| at 1 V excitation | Ω | 80 ... 1,000 |
| Noise at 25 °C and 5 V excitation (peak to peak) | | |
| at 1 Hz Bessel filter | μV/V | < 0.1 |
| at 10 Hz Bessel filter | μV/V | < 0.2 |
| at 100 Hz Bessel filter | μV/V | < 0.5 |
| at 1 kHz Bessel filter | μV/V | < 1.5 |
| Linearity error | % | < 0.02 of full scale value |
| Zero drift (full bridge with excitation 5 V) | %/10 K | < 0.02 ¹⁾ of full scale value |
| Full-scale drift (excitation 5 V) | %/10 K | < 0.05 of measured value |

¹⁾ with half bridge : 0.1

| Strain gage full bridge and half bridge 4 mV/V DC with excitation 1 V or 2.5 V or 5 V or 7.5 V (DC) | | |
|---|--------|---|
| Accuracy class | | 0.05 ¹⁾ |
| Bridge excitation voltage (DC) | V | 1 ; 2.5; 5; 7.5 (± 8 %) |
| Transducers that can be connected | | Strain gage full and half bridges |
| Permissible cable length between MX410B and transducer | m | < 100 (at U _B =7.5 V: < 50 m) |
| Measuring ranges | | |
| at 7.5 V excitation | mV/V | ± 4 |
| at 5 V excitation | mV/V | ± 4 |
| at 2.5 V excitation | mV/V | ± 10 |
| at 1 V excitation | mV/V | ± 20 |
| Additional shunt resistor can be connected (control signal) | kΩ | 100 ± 0.1% |
| Measurement frequency range (-3 dB) | Hz | 0 ... 39,300 with 96,000 Hz sample rate 0 ... 78,600 with 192,000 Hz sample rate |
| Transducer impedance | | |
| at 7.5 V excitation | Ω | 300 ... 1,000 ²⁾ (max. 50 m cable) |
| at 5 V excitation | Ω | 300 ... 1,000 ²⁾ |
| at 2.5 V excitation | Ω | 110 ... 1,000 ²⁾ |
| at 1 V excitation | Ω | 80 ... 1,000 ²⁾ |
| Noise at 25 °C and 5 V excitation (peak to peak) | | |
| at 1 Hz Bessel filter | μV/V | < 0.15 |
| at 10 Hz Bessel filter | μV/V | < 0.3 |
| at 100 Hz Bessel filter | μV/V | < 0.6 |
| at 1 kHz Bessel filter | μV/V | < 2 |
| at 10 kHz Bessel filter | μV/V | < 9 |
| at filter Off | μV/V | < 10 |
| Linearity error | % | < 0.02 of full scale value |
| Zero drift (full bridge with excitation 5 V) | %/10 K | < 0.05 ¹⁾ of full scale value |
| Full-scale drift (excitation 5 V) | %/10 K | < 0.05 of measured value |

¹⁾ with half bridge : 0.1

²⁾ Range can be modulated up to 5 kΩ, in this case: up to 1 % absolute zero deviation

Specifications MX410B (continued)

| Strain gage full bridge and half bridge 100 mV/V CF with excitation 1 V or 2.5 V (AC, effective) | | |
|--|------------------------------|---|
| Accuracy class | | 0.05 ¹⁾ |
| Carrier frequency (sine) | Hz | 4,800 ± 2 |
| Bridge excitation voltage (effective) | V | 1; 2.5; (±8 %) |
| Transducers that can be connected | | Strain gage and inductive full and half bridges |
| Permissible cable length between MX410B and transducer | m | < 100 |
| Measuring ranges at 2.5 V excitation at 1 V excitation | mV/V mV/V | ± 100 ± 250 |
| Measurement frequency range (-3 dB) | Hz | 0 ... 1,600 |
| Transducer impedance at 2.5 V excitation at 1 V excitation | Ω Ω | 110 ... 1,000 80 ... 1,000 |
| Noise at 25 °C and 2.5 V excitation (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter | μV/V μV/V μV/V μV/V | < 2 < 4 < 12 < 40 |
| Linearity error | % | < 0.02 of full scale value |
| Zero drift (full bridge with excitation 2.5 V) | %/10 K | < 0.01 ¹⁾ of full scale value |
| Full-scale drift (excitation 2.5 V) | %/10 K | < 0.05 of measured value |

¹⁾ with half bridge : 0.1

| Piezoresistive strain gage full bridge and half bridge 100 mV/V DC with excitation 2.5 V or 5 V (DC) | | |
|--|--|---|
| Accuracy class | | 0.05 ¹⁾ |
| Bridge excitation voltage (DC) | V | 2.5; 5 (± 5 %) |
| Transducers that can be connected | | Strain gage full and half bridges |
| Permissible cable length between MX410B and transducer | m | < 100 |
| Measuring ranges at 5 V excitation at 2.5 V excitation | mV/V mV/V | ± 50 ± 100 |
| Measurement frequency range (-3 dB) | Hz Hz | 0 ... 39,300 with 96,000 Hz sample rate 0 ... 78,600 with 192,000 Hz sample rate |
| Transducer impedance at 5 V excitation at 2.5 V excitation | Ω Ω | 300 ... 5,000 110 ... 5,000 |
| Noise at 25 °C and 5 V excitation (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter at 10 kHz Bessel filter at filter Off | μV/V μV/V μV/V μV/V μV/V μV/V | < 2 < 3 < 8 < 25 < 130 < 150 |
| Linearity error | % | < 0.02 of full scale value |
| Zero drift (full bridge with excitation 5 V) | %/10 K | < 0.03 ¹⁾ of full scale value |
| Full-scale drift (excitation 5 V) | %/10 K | < 0.05 of measured value |

¹⁾ with half bridge : 0.1

Specifications MX410B (continued)

| Voltage 10 V (DC) | | |
|---|--|---|
| Accuracy class | | 0.03 |
| Transducers that can be connected | | Voltage sensor ± 10 V |
| Permissible cable length between MX410B and transducer | m | < 100 |
| Measuring range | V | ± 10 |
| Measurement frequency range (-3 dB) | Hz Hz | 0 ... 39,300 with 96,000 Hz sample rate 0 ... 78,600 with 192,000 Hz sample rate |
| Internal resistance of the connected voltage source | k Ω | < 5 |
| Input impedance | M Ω | > 10 |
| Noise at 25 °C (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter at 10 kHz Bessel filter at filter Off | μ V μ V μ V μ V μ V μ V | < 25 < 50 < 100 < 300 < 600 < 1,000 |
| Linearity error | % | < 0.02 of full scale value |
| Common-mode rejection at DC common-mode at 50 Hz common-mode | dB dB | > 100 75 |
| Max. common-mode voltage (to housing and supply ground) | V | ± 60 |
| Zero drift | %/10 K | < 0.02 of full scale value |
| Full-scale drift | %/10 K | < 0.03 of measured value |

| Current 20 mA (DC) | | |
|---|--|---|
| Accuracy class | | 0.03 |
| Transducers that can be connected | | Transducer with 4 ... 20 mA current output |
| Permissible cable length between MX410B and transducer | m | < 100 |
| Measuring range | mA | ± 20 |
| Measurement frequency range (-3 dB) | Hz Hz | 0 ... 39,300 with 96,000 Hz sample rate 0 ... 78,600 with 192,000 Hz sample rate |
| Measuring resistance value | Ω | 50 |
| Noise at 25 °C (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter at 10 kHz Bessel filter at filter Off | μ A μ A μ A μ A μ A μ A | < 0.5 < 1.5 < 10 < 20 < 28 < 30 |
| Linearity error | % | < 0.02 of full scale value |
| Common-mode rejection at DC common-mode at 50 Hz common-mode | dB dB | > 100 typically 75 |
| Max. common-mode voltage (to housing and supply ground) | V | ± 60 |
| Zero drift | %/10 K | < 0.02 of full scale value |
| Full-scale drift | %/10 K | < 0.03 of measured value |

Specifications MX410B(continued)

| Current-fed piezoelectric transducers (IEPE - Integrated Electronics Piezo Electric, ICP®) | | |
|--|----------|---|
| Accuracy class | | 0.1 |
| Transducer technology | | IEPE (BNC adapter available: 1-SUBHD15-BNC) |
| Permissible cable length between MX410B and transducer | m | < 30 |
| Transducer identification (TEDS, IEEE 1451.4) | | only version 1.0 |
| Transducer excitation | mA | 4 mA ± 15% |
| Measuring ranges (AC) | V | ± 2; ± 10 |
| IEPE Compliance Voltage, typ. | V | 21 |
| Measurement frequency range (-3 dB) | Hz Hz | 0 ... 39,300 with 96,000 Hz sample rate 0 ... 78,600 with 192,000 Hz sample rate |
| Noise at 25 °C and measuring range ± 10 V (peak to peak) | | |
| at 1 Hz Bessel filter | µV | < 25 |
| at 10 Hz Bessel filter | µV | < 50 |
| at 100 Hz Bessel filter | µV | < 100 |
| at 1 kHz Bessel filter | µV | < 300 |
| at 10 kHz Bessel filter | µV | < 600 |
| at filter Off | µV | < 1,000 |
| Linearity error | % | < 0.1 of full scale value |
| Common-mode rejection | | |
| at DC common-mode | dB | > 100 |
| at 50 Hz common-mode, typically | dB | 75 |
| Max. common-mode voltage (to housing and supply ground) | V | ± 60 |
| Zero drift | %/10 K | < 0.1 of full scale value |
| Full-scale drift | %/10 K | < 0.05 of output value |

| Analog outputs | | |
|----------------------------|--------|---|
| Accuracy class | | 0.05 |
| Number of outputs | | 4 (input1 to output1 etc.) |
| Type of connection | | BNC |
| Max. cable length | m | < 30 |
| Bandwidth | kHz | Defined by the input signal filter |
| Output rate max. | kHz | 576 |
| Nominal (rated) voltage | V | ± 10 |
| Reference signal | | Common ground for all outputs, electrically isolated from supply and measurement inputs |
| D/A converter resolution | bits | 16 |
| Noise (peak to peak) | mV | < 10 |
| Permissible load impedance | Ω | > 2,000 / < 2 nF |
| Crosstalk attenuation | dB | > 65 |
| Min. settling time | µs | 120 |
| Zero drift | %/10 K | < 0.05 of full scale value |
| Full-scale drift | %/10 K | < 0.05 of output value |

| Real-time computation on the module | | |
|-------------------------------------|----|------|
| Root-mean-square unit (RMS) | | 4 |
| Peak-value unit | | |
| Number of peak values | | 8 |
| Max. output rate | Hz | 4800 |


Decimal sample rates and digital low pass filter, type Bessel

(4th order Bessel with sample rate < 100,000 Hz; 6th order with sample rate= 100,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phjase delay ^{*)} (ms) | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|--------|-----------|-----------|------------|---------------------------------|----------------|---------------|------------------|
| Bessel | 20,616 | 30,000 | 44,600 | 0,002 | 0.01 | 2.8 | 100,000 |
| | 12,373 | 20,000 | 43,000 | 0.005 | 0.02 | 1.0 | 100,000 |
| | 5917 | 10,000 | 23,465 | 0.021 | 0.04 | 0.8 | 100,000 |
| | 2929 | 5000 | 11,715 | 0.06 | 0.07 | 0.8 | 100,000 |
| | 1164 | 2000 | 4700 | 0.19 | 0.2 | 0.8 | 100,000 |
| | 584 | 1000 | 2350 | 0.40 | 0.3 | 0.6 | 100,000 |
| | 292 | 500 | 1175 | 0.82 | 0.7 | 0.6 | 100,000 |
| | 117 | 200 | 470 | 2.1 | 1.7 | 0.6 | 100,000 |
| | 58 | 100 | 235 | 4.2 | 3.5 | 0.6 | 100,000 |
| | 29.2 | 50 | 117.5 | 8.5 | 7 | 0.6 | 100,000 |
| | 11.7 | 20 | 47 | 21.3 | 17 | 0.6 | 100,000 |
| | 5.8 | 10 | 23.5 | 42.7 | 35 | 0.6 | 100,000 |
| | 2.91 | 5 | 11.74 | 85.5 | 70 | 0.6 | 100,000 |
| | 1.19 | 2 | 5.04 | 187 | 175 | 0.9 | 1000 |
| | 0.59 | 1 | 2.54 | 351 | 350 | 0.8 | 1000 |
| | 0.30 | 0.5 | 1.27 | 680 | 700 | 0.8 | 1000 |
| | 0.12 | 0.2 | 0.51 | 1669 | 1751 | 0.8 | 1000 |
| 0.06 | 0.1 | 0.25 | 3315 | 3499 | 0.8 | 1000 | |

^{*)} The analog-to-digital converter's delay time is 277 μ s for all sample rates and has not been accounted for in the "Phase delay" column!

Decimale sample rates : Bessel filter amplitude response

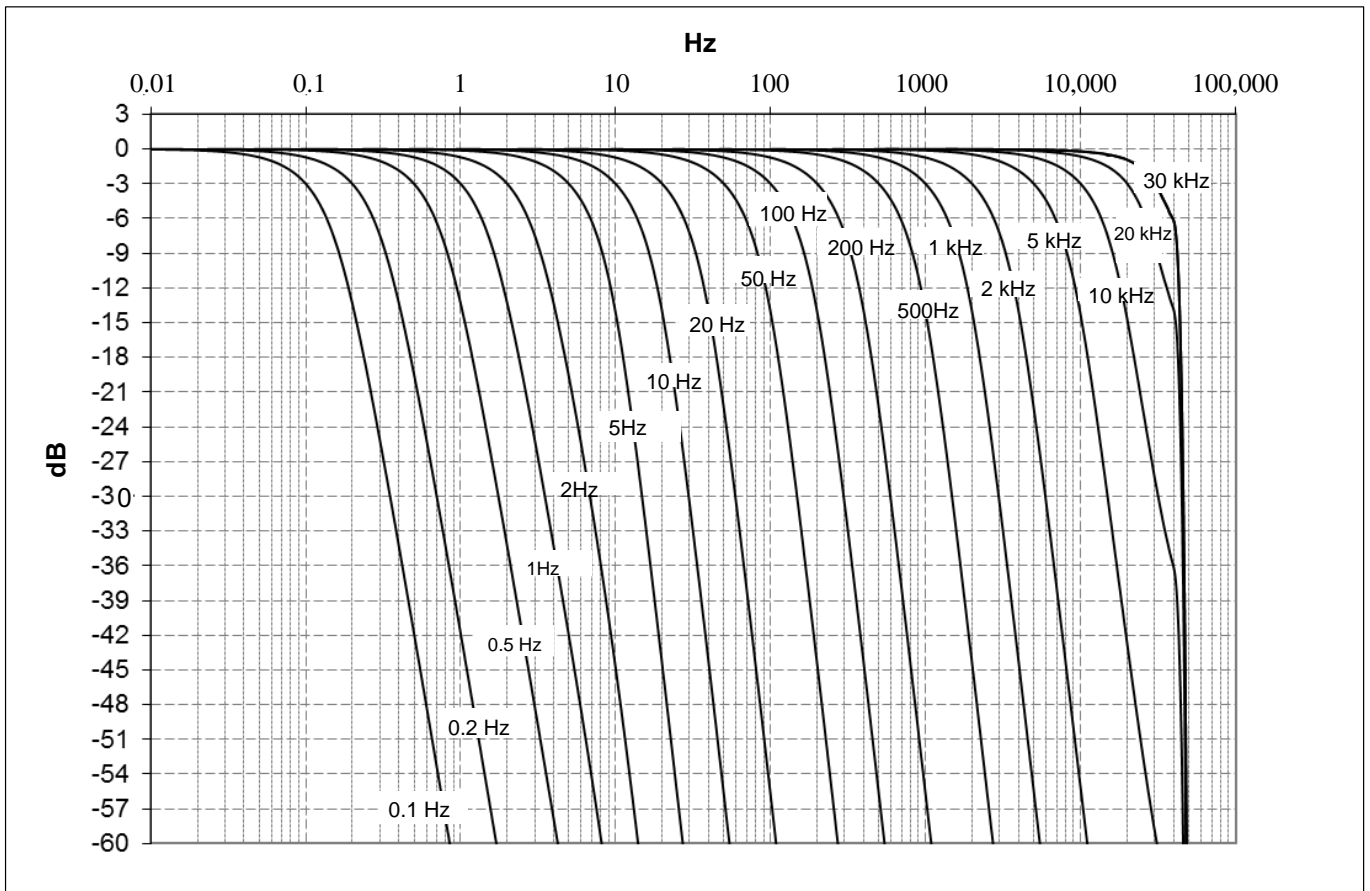


Decimal sample rates and digital low pass filter, type Butterworth

(4th order Butterworth with sample rate < 100,000 Hz; 6th order with sample rate= 100,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phase delay*) (ms) | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|-------------|-----------|-----------|------------|--------------------|----------------|---------------|------------------|
| Butterworth | 28,269 | 30,000 | 35,359 | 0.02 | 0.02 | 193 | 100,000 |
| | 18,328 | 20,000 | 26,009 | 0.03 | 0.03 | 17.6 | 100,000 |
| | 8994 | 10,000 | 14,155 | 0.06 | 0.04 | 15.5 | 100,000 |
| | 4475 | 5000 | 7265 | 0.1 | 0.09 | 15 | 100,000 |
| | 1787 | 2000 | 2929 | 0.3 | 0.2 | 14 | 100,000 |
| | 894 | 1000 | 1466 | 0.7 | 0.4 | 14 | 100,000 |
| | 447 | 500 | 733 | 1.3 | 0.8 | 14 | 100,000 |
| | 179 | 200 | 293 | 3.3 | 2 | 14 | 100,000 |
| | 89 | 100 | 147 | 6.6 | 4 | 14 | 100,000 |
| | 44.7 | 50 | 73.3 | 13 | 8 | 14 | 100,000 |
| | 17.9 | 20 | 29.3 | 33 | 21 | 14 | 100,000 |
| | 8.9 | 10 | 14.7 | 66 | 43 | 14 | 100,000 |
| | 4.47 | 5 | 7.33 | 132 | 85 | 14 | 100,000 |
| | 1.69 | 2 | 3.55 | 248 | 194 | 11 | 1000 |
| | 0.84 | 1 | 1.78 | 471 | 387 | 11 | 1000 |
| | 0.42 | 0.5 | 0.89 | 921 | 774 | 11 | 1000 |
| | 0.17 | 0.2 | 0.35 | 2266 | 1934 | 11 | 1000 |
| 0.08 | 0.1 | 0.18 | 4510 | 3869 | 11 | 1000 | |

*) The analog-to-digital converter's delay time is 277 μs for all sample rates and has not been accounted for in the "Phase delay" column!

Decimale sample rates : Butterworth filter amplitude response

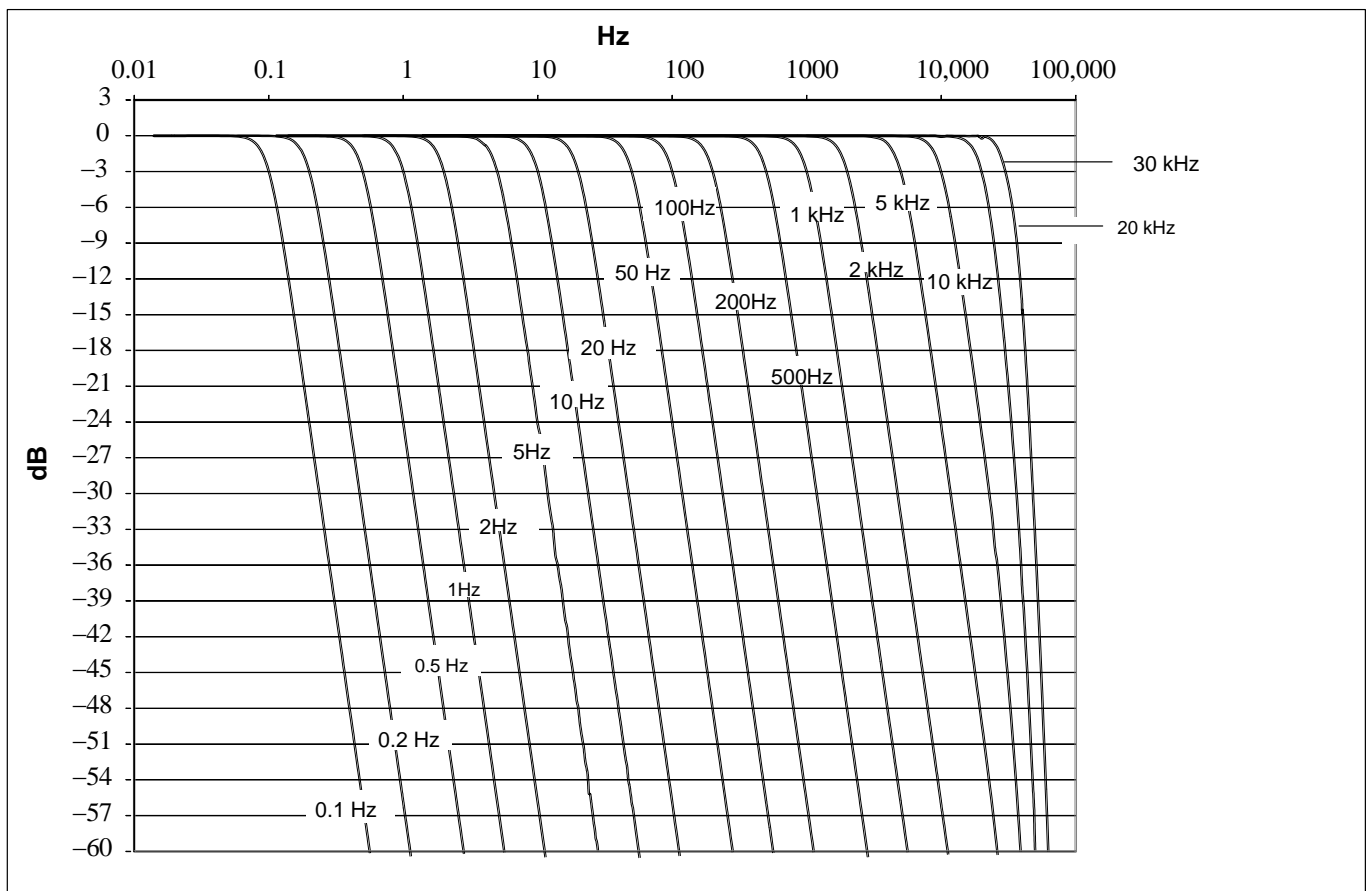

Decimal sample rates and digital low pass filter, (two-channel mode), type Bessel

(4th order with sample rate < 200,000 Hz; 6th order with sample rate = 200,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phase delay (ms) ^{*)} | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|--------|-----------|-----------|------------|--------------------------------|----------------|---------------|------------------|
| Bessel | 41,232 | 60,000 | 89,200 | 0.001 | 0.005 | 2.8 | 200,000 |
| | 24,746 | 40,000 | 86,000 | 0.0025 | 0.01 | 1.0 | 200,000 |
| | 11,834 | 20,000 | 46,930 | 0.01 | 0.02 | 0.8 | 200,000 |
| | 5858 | 10,000 | 23,430 | 0.03 | 0.035 | 0.8 | 200,000 |
| | 2328 | 4000 | 8400 | 0.09 | 0.1 | 0.8 | 200,000 |
| | 1168 | 2000 | 4700 | 0.40 | 0.15 | 0.6 | 200,000 |
| | 584 | 1000 | 2350 | 0.82 | 0.35 | 0.6 | 200,000 |
| | 234 | 400 | 940 | 2.1 | 0.85 | 0.6 | 200,000 |
| | 116 | 200 | 470 | 4.2 | 1.75 | 0.6 | 200,000 |
| | 58.4 | 100 | 235 | 8.5 | 3.5 | 0.6 | 200,000 |
| | 23.4 | 40 | 94 | 21.3 | 8.5 | 0.6 | 200,000 |
| | 11.6 | 20 | 47 | 42.7 | 17.5 | 0.6 | 200,000 |
| | 5.82 | 10 | 23.48 | 85.5 | 35 | 0.6 | 200,000 |
| | 2.38 | 4 | 10.08 | 187 | 87.5 | 0.9 | 1000 |
| | 1.18 | 2 | 5.08 | 351 | 175 | 0.8 | 1000 |
| | 0.60 | 1 | 2.54 | 680 | 350 | 0.8 | 1000 |
| 0.24 | 0.4 | 1.02 | 1669 | 875 | 0.8 | 1000 | |
| 0.12 | 0.2 | 0.50 | 3315 | 1750 | 0.8 | 1000 | |

^{*)} The analog-to-digital converter's delay time is 140 µs for all sample rates and has not been accounted for in the "Phase delay" column!

Decimal sample rates and digital low pass filter, (two-channel mode), type Butterworth

(4th order with sample rate < 200,000 Hz; 6th order with sample rate = 200,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phase delay (ms) ^{*)} | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|-------------|-----------|-----------|------------|--------------------------------|----------------|---------------|------------------|
| Butterworth | 56,538 | 60,000 | 70,718 | 0.01 | 0.01 | 193 | 200,000 |
| | 36,656 | 40,000 | 52,018 | 0.015 | 0.015 | 17.6 | 200,000 |
| | 17,988 | 20,000 | 28,310 | 0.03 | 0.02 | 15.5 | 200,000 |
| | 8950 | 10,000 | 14,530 | 0.05 | 0.045 | 15 | 200,000 |
| | 3576 | 4000 | 5858 | 0.15 | 0.1 | 14 | 200,000 |
| | 1788 | 2000 | 2932 | 0.35 | 0.2 | 14 | 200,000 |
| | 894 | 1000 | 1466 | 0.65 | 0.4 | 14 | 200,000 |
| | 358 | 400 | 586 | 1.65 | 1 | 14 | 200,000 |
| | 178 | 200 | 294 | 3.3 | 2 | 14 | 200,000 |
| | 89.4 | 100 | 147 | 6.5 | 4 | 14 | 200,000 |
| | 35.8 | 40 | 59 | 16.5 | 10.5 | 14 | 200,000 |
| | 17.8 | 20 | 29.4 | 33 | 21.5 | 14 | 200,000 |
| | 8.94 | 10 | 14.66 | 66 | 42.5 | 14 | 200,000 |
| | 3.38 | 4 | 7.1 | 124 | 97 | 11 | 1000 |
| | 1.68 | 2 | 3.6 | 235 | 193 | 11 | 1000 |
| | 0.84 | 1 | 1.78 | 460 | 387 | 11 | 1000 |
| 0.34 | 0.4 | 0.70 | 1133 | 967 | 11 | 1000 | |
| 0.16 | 0.2 | 0.36 | 2255 | 1934 | 11 | 1000 | |

^{*)} The analog-to-digital converter's delay time is 140 µs for all sample rates and has not been accounted for in the "Phase delay" column!

Classic HBM sample rates and digital low pass filter, type Bessel

(4th order with sample rate < 96,000 Hz; 6th order with sample rate=96,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phase delay (ms) ^{*)} | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|--------|-----------|-----------|------------|--------------------------------|----------------|---------------|------------------|
| Bessel | 20,000 | 29,250 | 43,000 | 0.002 | 0.016 | 4.1 | 96,000 |
| | 10,000 | 16,810 | 40,260 | 0.008 | 0.023 | 1.5 | 96,000 |
| | 5000 | 8510 | 19,906 | 0.027 | 0.042 | 0.9 | 96,000 |
| | 2000 | 3515 | 8275 | 0.094 | 0.1 | 0.6 | 96,000 |
| | 1000 | 1715 | 4070 | 0.22 | 0.2 | 0.6 | 96,000 |
| | 500 | 852 | 2008 | 0.47 | 0.41 | 0.6 | 96,000 |
| | 200 | 341 | 803 | 1.22 | 1.01 | 0.8 | 96,000 |
| | 100 | 171 | 402 | 2.5 | 2.01 | 0.8 | 96,000 |
| | 50 | 84.2 | 215 | 4 | 4.08 | 1 | 19,200 |
| | 20 | 33.7 | 86 | 10 | 10.2 | 1 | 9600 |
| | 10 | 16.9 | 43 | 20 | 20.6 | 1 | 9600 |
| | 5 | 8.41 | 21.5 | 40 | 41 | 1 | 4800 |
| | 2 | 3.37 | 8.6 | 98 | 102.8 | 1 | 1200 |
| | 1 | 1.58 | 4.3 | 196 | 206.4 | 1 | 600 |
| | 0.5 | 0.84 | 2.15 | 392 | 411.2 | 1 | 600 |
| | 0.2 | 0.34 | 0.86 | 982 | 1026 | 1 | 300 |
| 0.1 | 0.17 | 0.43 | 1968 | 2052 | 1 | 150 | |

^{*)} The delay of the A/D converter is 293 μs for all sample rates. it has not been accounted for in the "Phase delay" column!

Classic HBM sample rates and digital low pass filter, type Butterworth

(4th order with sample rate < 96,000 Hz; 6th order with sample rate=96,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phase delay (ms) ^{*)} | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|-------------|-----------|-----------|------------|--------------------------------|----------------|---------------|------------------|
| Butterworth | 20,000 | 21,700 | 27,500 | 0.025 | 0.02 | 15.6 | 96,000 |
| | 10,000 | 11,100 | 15,500 | 0.06 | 0.04 | 15.6 | 96,000 |
| | 5000 | 5585 | 8100 | 0.13 | 0.08 | 14.5 | 96,000 |
| | 2000 | 2238 | 3280 | 0.3 | 0.2 | 14.5 | 96,000 |
| | 1000 | 1119 | 1640 | 0.6 | 0.4 | 14.5 | 96,000 |
| | 500 | 560 | 820 | 1.2 | 0.8 | 14.5 | 96,000 |
| | 200 | 237 | 420 | 2.1 | 1.6 | 11 | 19,200 |
| | 100 | 118 | 210 | 4 | 3.3 | 11 | 19,200 |
| | 50 | 59 | 105 | 7.8 | 6.6 | 11 | 19,200 |
| | 20 | 24 | 42 | 19.4 | 16.1 | 11 | 4800 |
| | 10 | 11.8 | 21 | 38.6 | 32.4 | 11 | 2400 |
| | 5 | 5.9 | 10.5 | 76.5 | 65 | 11 | 1200 |
| | 2 | 2.4 | 4.2 | 191 | 163 | 11 | 600 |
| | 1 | 1.2 | 2.1 | 382 | 325 | 11 | 300 |
| | 0.5 | 0.59 | 1.05 | 760 | 653 | 11 | 300 |
| | 0.2 | 0.24 | 0.42 | 1900 | 1630 | 11 | 150 |
| 0.1 | 0.12 | 0.21 | 3790 | 3260 | 11 | 150 | |

^{*)} The delay of the A/D converter is 293 μs for all sample rates. it has not been accounted for in the "Phase delay" column!

Classical HBM sample rates and active low pass filter sample (two-channel mode), type Bessel

(4th order with sample rate < 192,000 Hz; 6th order with sample rate = 192,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phase delay (ms) ^{*)} | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|--------|-----------|-----------|------------|--------------------------------|----------------|---------------|------------------|
| Bessel | 40,000 | 58,500 | 86,000 | 0.001 | 0.008 | 1.6 | 192,000 |
| | 20,000 | 33,620 | 80,520 | 0.004 | 0.012 | 1.5 | 192,000 |
| | 10,000 | 17,020 | 39,812 | 0.0135 | 0.021 | 0.9 | 192,000 |
| | 4000 | 7030 | 16,550 | 0.047 | 0.05 | 0.6 | 192,000 |
| | 2000 | 3430 | 8140 | 0.11 | 0.1 | 0.6 | 192,000 |
| | 1000 | 1704 | 4016 | 0.235 | 0.21 | 0.6 | 192,000 |
| | 400 | 682 | 1606 | 0.61 | 0.51 | 0.8 | 192,000 |
| | 200 | 342 | 804 | 1.25 | 1.00 | 0.8 | 192,000 |
| | 100 | 168.4 | 430 | 2 | 2.04 | 1 | 19,200 |
| | 40 | 67.4 | 172 | 5 | 5.1 | 1 | 19,200 |
| | 20 | 33.8 | 86 | 10 | 10.3 | 1 | 19,200 |
| | 10 | 16.82 | 43 | 20 | 20.5 | 1 | 9600 |
| | 4 | 6.74 | 17.2 | 49 | 51.4 | 1 | 2400 |
| | 2 | 3.36 | 8.6 | 98 | 103.2 | 1 | 1200 |
| | 1.0 | 1.68 | 4.3 | 196 | 205.6 | 1 | 1200 |
| | 0.4 | 0.68 | 1.72 | 491 | 513 | 1 | 600 |
| 0.2 | 0.34 | 0.86 | 984 | 1026 | 1 | 300 | |

^{*)} The delay of the A/D converter is 141 μs for all sample rates, it has not been accounted for in the "Phase delay" column!

Classical HBM sample rates and active low pass filter sample (two-channel mode), type Butterworth

(4th order with sample rate < 192,000 Hz; 6th order with sample rate = 192,000 Hz)

| Type | -1dB (Hz) | -3dB (Hz) | -20dB (Hz) | Phase delay (ms) ^{*)} | Rise time (ms) | Overshoot (%) | Sample rate (Hz) |
|-------------|-----------|-----------|------------|--------------------------------|----------------|---------------|------------------|
| Butterworth | 40,000 | 43,400 | 55,000 | 0.013 | 0.01 | 17.8 | 192,000 |
| | 20,000 | 22,200 | 31,000 | 0.03 | 0.02 | 15.6 | 192,000 |
| | 10,000 | 11,170 | 16,200 | 0.07 | 0.04 | 14.5 | 192,000 |
| | 4000 | 4476 | 6560 | 0.15 | 0.1 | 14.5 | 192,000 |
| | 2000 | 2238 | 3280 | 0.3 | 0.2 | 14.5 | 192,000 |
| | 1000 | 1120 | 1640 | 0.6 | 0.4 | 14.5 | 192,000 |
| | 400 | 474 | 840 | 1.05 | 0.8 | 14.5 | 19,200 |
| | 200 | 236 | 420 | 2 | 1.65 | 11 | 19,200 |
| | 100 | 118 | 210 | 3.9 | 3.3 | 11 | 19,200 |
| | 40 | 48 | 84 | 9.7 | 8.05 | 11 | 9600 |
| | 20 | 23.6 | 42 | 19.3 | 16.2 | 11 | 4800 |
| | 10 | 11.8 | 21 | 38.3 | 32.5 | 11 | 2400 |
| | 4 | 4.8 | 8.4 | 95.5 | 81.5 | 11 | 1200 |
| | 2 | 2.4 | 4.2 | 191 | 162.5 | 11 | 600 |
| | 1 | 1.18 | 2.1 | 380 | 326.5 | 11 | 600 |
| | 0.4 | 0.48 | 0.84 | 950 | 815 | 11 | 300 |
| 0.2 | 0.24 | 0.42 | 1895 | 1630 | 11 | 300 | |

^{*)} The delay of the A/D converter is 141 μs for all sample rates, it has not been accounted for in the "Phase delay" column!

Specifications NTX001 power pack

| NTX001 | | |
|------------------------------------|--|--|
| Nominal (rated) input voltage (AC) | V | 100 ... 240 ($\pm 10\%$) |
| No-load power consumption at 230 V | W | 0.5 |
| Nominal (rated) loading | U_A | V |
| | I_A | A |
| Static output data | U_A | V |
| | I_A | A |
| | U_{Br} (output ripple voltage; peak to peak) | mV |
| Current limiting, typically from | A | 1.6 |
| Isolation primary - secondary | | electrical, by optical coupler and converter |
| Creepage and clearance distances | mm | ≥ 8 |
| High-voltage test | kV | ≥ 4 |
| Ambient temperature | $^{\circ}\text{C}$ | 0 ... +40 [32 ... +104] |
| Storage temperature | $^{\circ}\text{C}$ | -40 ... +70 [-40 ... +158] |




Accessories MX410B, to be ordered separately

| MX410B accessories | | |
|---|--|--|
| Article | Description | Order No. |
| Power | | |
| AC-DC power supply / 30 W | Input : 100 ... 240 V AC ($\pm 10\%$), 1.5 m cable Output: 24 V DC, max. 1.25 A, 2 m cable with ODU connector | 1-NTX001 |
| 3m cable - QuantumX supply | 3 m cable for voltage supply of QuantumX modules; Suitable plug (ODU Medi-Snap S11M08-P04MJGO-5280) on one side and open strands on the other end. | 1-KAB271-3 |
| Communication | | |
| Ethernet cable | Ethernet patch cable for direct operation between a PC or Notebook and a module / device, length 2 m, type CAT6A | 1-KAB239-2 |
| IEEE1394b FireWire cable (module-to-module) | FireWire connection cable for QuantumX or SomatXR-modules; with matching plugs on both sides. Length 0.2 m (angled) / 2 m / 5 m Note: The cable enables modules to be supplied with power (max. 1.5 A, from the source to the last drain). | 1-KAB272-W-0.2 1-KAB272-2 1-KAB272-5 |

Accessories MX410B, to be ordered separately (continued)

| Accessories MX410B | | |
|---|---|----------------|
| Article | Description | Order No. |
| Mechanic | | |
| Connecting elements for QuantumX modules | Connecting elements (clips) for QuantumX modules; Set comprising 2 case clips including mounting material for fast connection of 2 modules. | 1-CASECLIP |
| Connecting elements for QuantumX modules | Fitting panel for mounting of QuantumX modules using case clips (1-CASECLIP), lashing strap or cable tie. Basic fastening by 4 screws. | 1-CASEFIT |
| QuantumX Backplane (small) | QuantumX Backplane - for a maximum of 5 modules; - Connection of external modules by FireWire possible - Power supply: 24 V DC / max. 3.75 A (90 W) | 1-BPX003 |
| QuantumX Backplane (big) | QuantumX Backplane – for a maximum of 9 modules - Mounting on wall or control cabinet (19") - Connection of external modules by FireWire possible - Power supply: 24 V DC / max. 5 A (150 W) | 1-BPX001 |
| QuantumX Backplane (Rack) | QuantumX Backplane – Rack for maximum 9 modules; - 19" rack mounting with handles left and right; - Connection of external modules via FireWire possible; - Power supply: 24 V DC / max. 5 A (150 W). | 1-BPX002 |
| Transducer side | | |
| 120 ohm strain gauge quarter bridge module | Signal conditioning of strain gauge quarter bridge at QuantumX full bridge input. Integrated 120-ohm completion resistor; soldering points for transducer cable (3 wire); TEDS; D-Sub-HD device connection. | 1-SCM-SG120 |
| 350 ohm strain gauge quarter bridge module | Signal conditioning of strain gauge quarter bridge at QuantumX full bridge input. Integrated 350-ohm completion resistor; soldering points for transducer cable (3 wire); TEDS; D-Sub-HD device connection. | 1-SCM-SG350 |
| 1000 ohm strain gauge quarter bridge module | Signal conditioning of strain gauge quarter bridge at QuantumX full bridge input. Integrated 1000-ohm completion resistor; soldering points for transducer cable (3 wire); TEDS; D-Sub-HD device connection. | 1-SCM-SG1000 |
| High-voltage signal conditioner | High-voltage signal conditioner for differential measurement of voltages up to 300 V CAT II with type MX840A/B, MX410/B and MX440A/B QuantumX modules, with SubHD connector and fixed, 1-m-long measuring leads with 4-mm laboratory plugs. | 1-SCM-HV |
| DSubH 15-pol. to-BNC pole adapter | Adapter for QuantumX, BNC socket to SubHD 15-pole (pin 14), for connecting 60 V, +/-10 V or IEPE / ICP [®] , provided that the amplifier supports this function | 1-SUBHD15-BNC |
| DSubHD 15-pole connector kit with TEDS chip | DSubHD 15-pole connector kit (male) with TEDS chip for storage of a sensor data sheet; Housing: Metallized plastic with knurled screws. Note: The TEDS chip comes blank. | 1-SUBHD15-MALE |
| TEDS-Package (10 piece) | Package of TEDSD chips. Package of 10 1-wire-EEPROM DS24B33 (IEEE 1451.4 TEDS) | 1-TEDS-PAK |
| Port saver, SubHD 15 pol. | 4 x D-SUB HD 15 pin male to female port savers; protecting the wear and tear for frequent plugging and unplugging. Extends contact durability by min. 500. Adaptor attaches securely with screws 4-40 UNC. | 1-SUBHD15-SAVE |

Accessories MX410B, to be ordered separately (continued)

| Accessories MX410B | | |
|--|---|-------------------|
| Article | Description | Order No. |
| Software and product packages | | |
| catman [®] AP  | Complete package including catman [®] Easy functionality plus additional modules such as integration of video cameras (EasyVideoCam), complete post-process analysis (EasyMath), automation of recurring processes (EasyScript), offline preparation of measurement projects (EasyPlan) as well as additional functions such as calculating electrical power, special filters, frequency spectrum, etc. More details at www.hbm.com/catman/ | 1-CATMAN-AP |
| catman [®] Easy  | The basic software package for measurement data acquisition comprises convenient channel parameterization using TEDS or the sensor database, measurement job parameterization, individual visualization, data storage and reporting. | 1-CATMAN-EASY |
| catman [®] PostProcess  | Post Process edition for visualization, preparation and analysis of measurement data, including many mathematical functions, data export and reporting. | 1-CATEASY-PROCESS |
| MX410B + catman [®] EASY | Package including: - MX840B amplifier (1-MX840B) - Power supply (1-NTX001) - 8 transducer plugs with TEDS (1-SUBHD15-MALE) - Ethernet Cross-over cable (1-KAB239-2) - catman [®] Easy software from HBM (1-CATMAN-EASY) - Including software maintenance for the first 12 months | 1-MX410B-PAKEASY |
| MX410B + catman [®] AP | Package including: - MX840B amplifier (1-MX840B) - Power supply (1-NTX001) - 8 transducer plugs with TEDS (1-SUBHD15-MALE) - Ethernet Cross-over cable (1-KAB239-2) - catman [®] AP software from HBM (1-CATMAN-AP) - Including software maintenance for the first 12 months | 1-MX410B-PAKAP |
| LabVIEW [™] -Treiber ¹⁾ | Universal driver from HBM for LabVIEW [™] . | 1-LabVIEW-DRIVER |
| CANape [®] driver | QuantumX driver for the software CANape [®] from Vector Informatik. CANape versions from 10.0 are supported. | 1-CANAPE-DRIVER |

¹⁾ More drivers and partners at www.hbm.com/quantumX/

Subject to modifications.
 All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.

托驰 (上海) 工业传感器有限公司
 上海市嘉定区华江路348号1号楼707室
 电话: +86 021 51069888
 传真: +86 021 51069009
 邮箱: zhang@yanatoo.com
 网址: www.sensor-hbm.com

measure and predict with confidence

