

U1A

Force Transducer




Special features


- Tensile force / compressive force transducer
- Nominal forces 10 N ... 50 N
- Integrated overload protection
- Side-force support
- Variable force introduction

Dimensions (in mm; 1 mm=0.03937 inches)

Dimensional variation in accordance with DIN ISO 7168 - mK

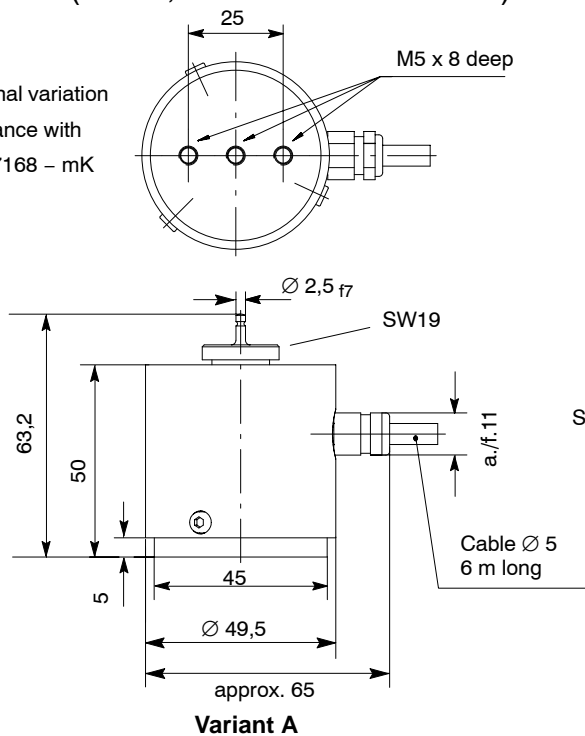

Coupling for knuckle eye (variant A)

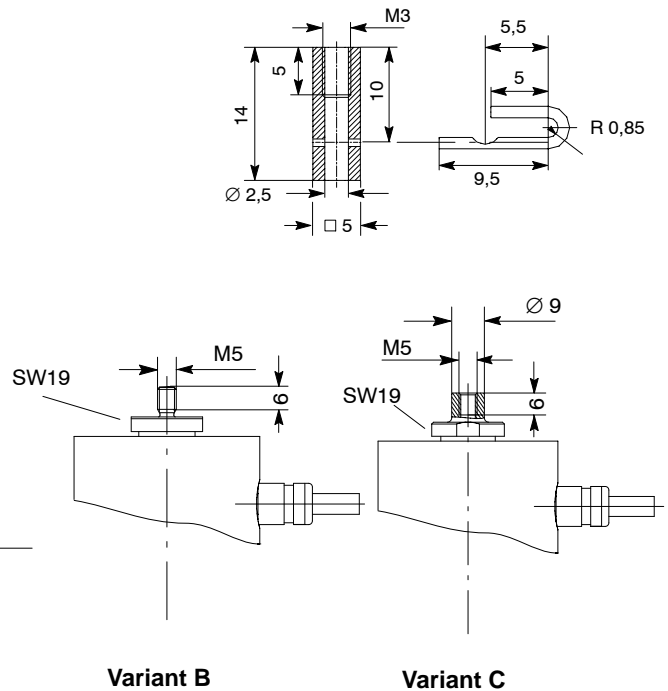

Specifications

Type			U1A		
Accuracy class			0.1		
Nominal force		N	10	20	50
Nominal sensitivity		C_{nom}	2		
rel. sensitivity deviation		d_c	0.2		
rel. tensile-compressive sensitivity difference		d_{zd}	0.4		
rel. deviation from zero		$d_{s,o}$	1		
Rel. range of inversion ($0.2F_{nom}$ to F_{nom})		u	0.15		
Linearity deviation		d_{lin}	0.1		
Temperature effect on the sensitivity/10 K by reference to nominal sensitivity		TK_C	%		
Temperature effect on the zero signal/10 K by reference to nominal sensitivity		TK_0	%		
Effect of eccentricity / mm		d_E	%		
Rel. creep over 30 min		d_{crF+E}	%		
Input resistance		R_e	Ω		
Output resistance		R_a	Ω		
Isolation resistance		R_{is}	Ω		
Reference excitation voltage		U_{ref}	V		
Operating range of the excitation voltage		$B_{U,G}$	V		
Nominal temperature range		$B_{t,nom}$	$^{\circ}C$		
Operating temperature range		$B_{t,G}$	$^{\circ}C$		
Storage temperature range		$B_{t,S}$	$^{\circ}C$		
Reference temperature		t_{ref}	$^{\circ}C$		
Max. operational force		(F_G)	%		
Limit force		(F_L)	%		
Breaking force		(F_B)	%		
Static lateral limit force		(F_Q)	%		
Nominal displacement		S_{nom}	mm		
Fundamental resonance frequency		f_G	Hz		
Weight			kg		
Rel. permissible vibrational stress		F_{rb}	%		
Degree of protection to DIN EN 60529			IP 40		

Knuckle eyes

Options

Code	Option 1: Measuring range
010N	10 N
020N	20 N
050N	50 N

Code	Option 2: Force introduction
A	with pin
B	with M5 external thread
C	with M5 internal thread

Code	Option 3: Cable type
K	with cable, 6 m, free ends
M	with cable, 6 m, MS connector
D	with cable, 6 m, D15 connector

Bestell-Beispiel
K-U1A- 0 1 0 N - A K

Scope of supply: transducer and corresponding force introduction piece, coupling for knuckle eye for Code A

Accessories: (not included in scope of supply)

- Upper knuckle eye for coupling M3 (Option A), 1-U1/5kg/ZGO
- Upper knuckle eye for internal thread M5 (Option C), 1-U1/5kg/ZGU
- Lower knuckle eye for internal thread M5 (all types), 1-U1/5kg/ZGU

Modifications reserved.

All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

托驰 (上海) 工业传感器有限公司
 上海市嘉定区华江路348号1号楼707室
 电话: +86 021 51069888
 传真: +86 021 51069009
 邮箱: zhang@yanatoo.com
 网址: www.sensor-hbm.com



measurement with confidence