


# PW25/...

single point load cell  
for rough environment,  
“Easy-To-Clean”




## Special features

- Hermetically sealed (IP68; IP69K)
- Highest reliability
- Integrated encapsulated overload stop
- Stainless steel
- Reduced minimum load cell verification interval ( $v_{\min}$ ) for multi range applications
- Six-wire circuit
- Integrated connection for protective cable conduit systems
- Easily adaptable to existing standard mounting situations

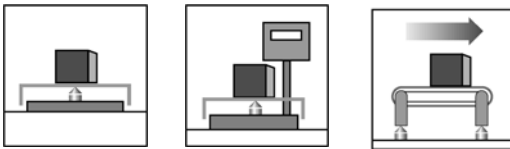

Dimensions (in mm; 1 mm = 0.03937 inches)

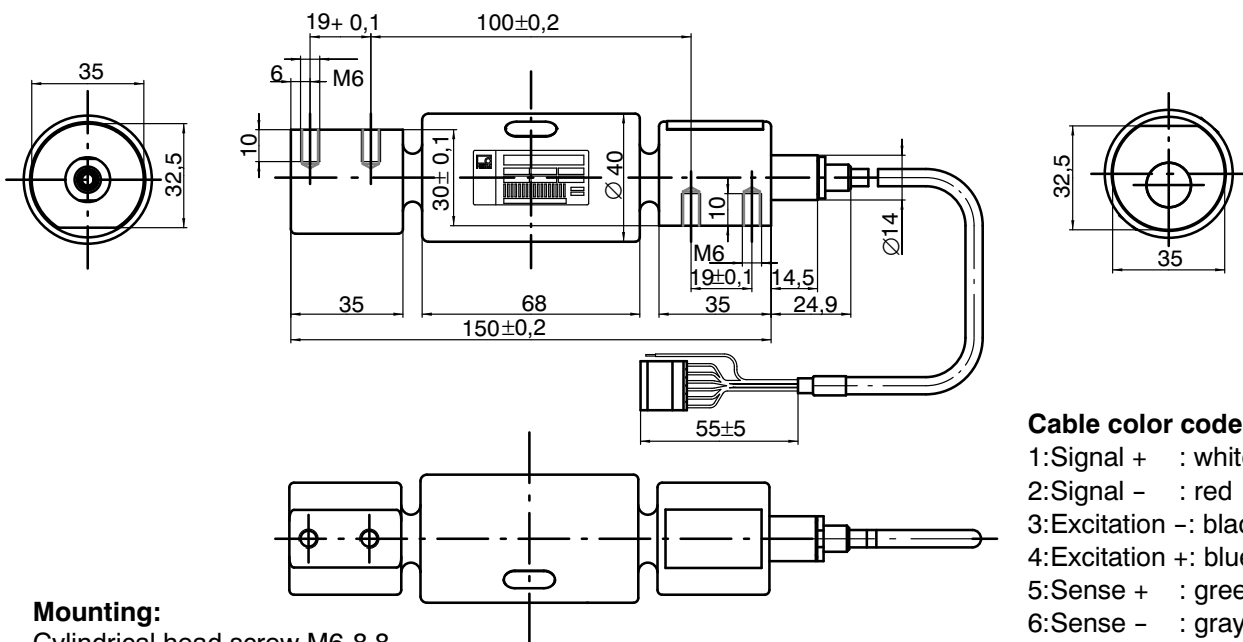

### Mounting:

Cylindrical head screw M6-8.8  
Tightening torque: 10 N·m

## Specifications

Type	PW25/...	
Accuracy class <sup>1)</sup>	C3MR	
Maximum number of load cell verification intervals ( $n_{LC}$ )	3000	
Maximum capacity ( $E_{max}$ )	kg	10                      20
Minimum LC verification interval ( $v_{min}$ )	g	1                              2
Maximum platform size	mm	400 x 400
Nominal (rated) sensitivity ( $C_n$ )	mV/V	2.0 ± 0.2
Zero signal (without load)		0 ± 0.1
Temperature coefficient of sensitivity ( $TK_C$ ) <sup>2)</sup>	% of $C_n$ / 10 K	± 0.0175
Temperature range: +20 ... +40°C [+68 ... +104°F] -10 ... +20°C [+14 ... +68°F]		± 0.0117
Temperature coefficient of zero signal ( $TK_0$ )		± 0.0140
Hysteresis ( $d_{hy}$ ) <sup>2)</sup>	% of $C_n$	± 0.0166
Non-linearity ( $d_{lin}$ ) <sup>2)</sup>		± 0.0166
Minimum dead load output return (MDLOR)		± 0.0166
Off-center load error <sup>3)</sup>		± 0.0233
Input resistance ( $R_{LC}$ )	Ω	380 ± 15
Output resistance ( $R_0$ )		360 ± 10
Reference excitation voltage ( $U_{ref}$ )	V	5
Nominal (rated) range of the excitation voltage ( $B_U$ )		1 ... 12
Maximum excitation voltage		15
Insulation resistance ( $R_{is}$ ) at 100 V <sub>DC</sub>	GΩ	> 1
Nominal (rated) ambient temperature range ( $B_T$ )	°C [°F]	-10 ... +40 [+14 ... +104°F]
Operating temperature range ( $B_{tu}$ )		-20 ... +50 [-4 ... +122°F]
Storage temperature range ( $B_{tl}$ )		-25 ... +70 [-13 ... +158°F]
Service load (EU) at max. 120 mm eccentricity	% of $E_{max}$	150
Limit load ( $E_L$ ) at 20 mm eccentricity		1000
Limit lateral loading ( $E_{lq}$ ), static		200
Breaking load ( $E_d$ )		> 1500
Relative permitted vibrational stress ( $F_{srel}$ ) at max. 50 mm eccentricity		70
Nominal (rated) displacement at $E_{max}$ ( $s_{nom}$ ), approx.	mm	< 0.18
Natural frequency, approx.	Hz	315
Weight (G), approx.	kg	0.8
Degree of protection per EN 60 529 (IEC 529)		IP 68 (test conditions 100 h at 1 m water column); IP69K (water at high pressure, steam jet cleaning) <sup>4)</sup>
Material: Measuring body		Stainless steel <sup>5)</sup>
Cable sheath		PUR

<sup>1)</sup> According to OIML R60 with  $P_{LC} = 0.7$ .

<sup>2)</sup> The values for non-linearity ( $d_{lin}$ ), hysteresis ( $d_{hy}$ ) and temperature coefficient of sensitivity ( $TK_C$ ) are typical values. The sum of these values is within the cumulative error limits according to OIML R60.

<sup>3)</sup> According to OIML R76.

<sup>4)</sup> Based on DIN 40050, Part 9 specifications, for road vehicles.

<sup>5)</sup> According to EN 10088-1, list of materials on request.

Modifications reserved.

All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

### Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45 · 64293 Darmstadt · Germany  
Tel. +49 6151 803-0 · Fax: +49 6151 803-9100  
Email: [info@hbm.com](mailto:info@hbm.com) · [www.hbm.com](http://www.hbm.com)

measure and predict with confidence

